




Congratulations for purchasing the newest cult pedal from Hamburg. The ODR-*mini* delivers creamy, natural tone from pushed clean amp to gain filled stack tone like its legendary brother ODR-1. You'll love the warm mid-tones for rock and blues, and the screaming hard rock sounds the *mini* creates. Plus the mini features true-bypass switching, SPECTRUM pot with mid-click, fluorescent pointers of the „GitD“-knobs (Glow-in-the-Dark). Guaranteed to be a BIG part of your sound while a small part of your pedal board. **Welcome to the growing Nobels family! Enjoy!**

ODR-*mini*
Natural OVERDRIVE

Owners Manual

English

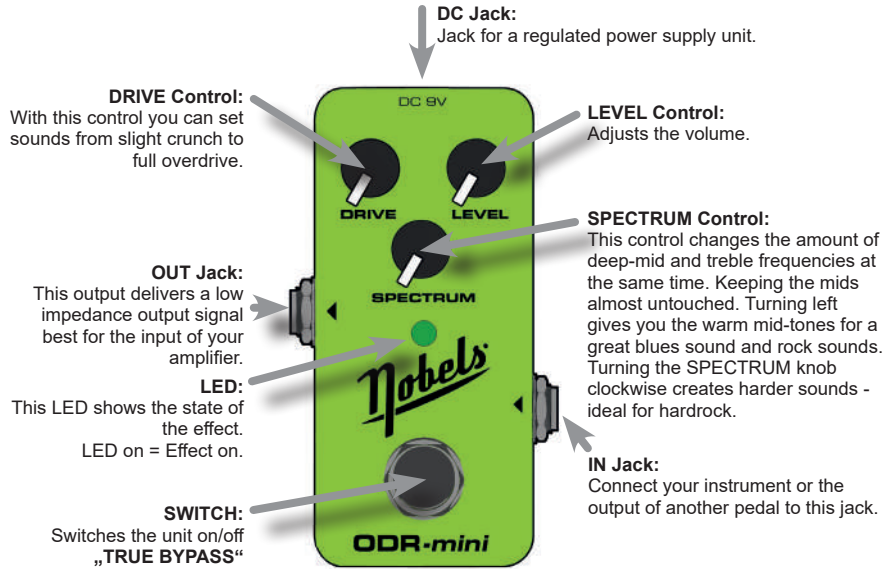

Specifications

Power	stabilized power supply (9 Volt DC)* **
Power connector	2.1 mm / negative center
Consumption	max. 11 mA
Input impedance	ca. 1 MΩ
Output impedance	ca. 2.2 kΩ
Max. input level	+6 dB
Controls	Drive, Spectrum, Level („Glow In the Dark“ knobs)
Jacks	DC, Input 1/4" (6.3 mm), Output 1/4" (6.3 mm)
LED	1x LED: green (On/Off)
Dimensions	41.5 mm (W) x 93 mm (L) x 50 mm (H)
Weight	175 g

Specifications are subject to change without notice!

* This pedal is optimized for 9V DC. Operation with power supply units of up to 18 V DC is possible. Sound results then will vary slightly.

** Hum will occur when using unstabilized power supplies!

Power supply specifications: see imprint on bottom of the unit.

Waste Electrical and Electronic Equipment labeling:

In the European Union, do not discard this product as unsorted municipal waste. Contact your local authorities or send it back to the Nobels distributor.

More information:

www.nobels.com



Important notes

Avoid using this unit in extreme humidity, heat or dusty environment.

When operating the ODR-*mini* from AC line, please use a proper stabilized power supply (DC 9-18 Volt) / negative center.

Set the desired sound with the 3 controls.

Sound examples

